
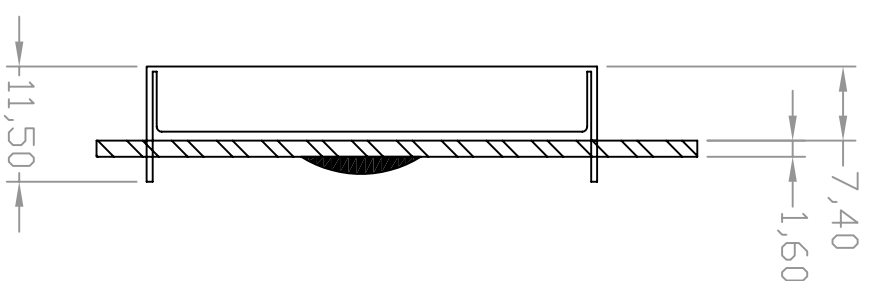



REV 版本	DESCRIPTION 描述	DATE 日期
VER: 1.0		2013-3-14

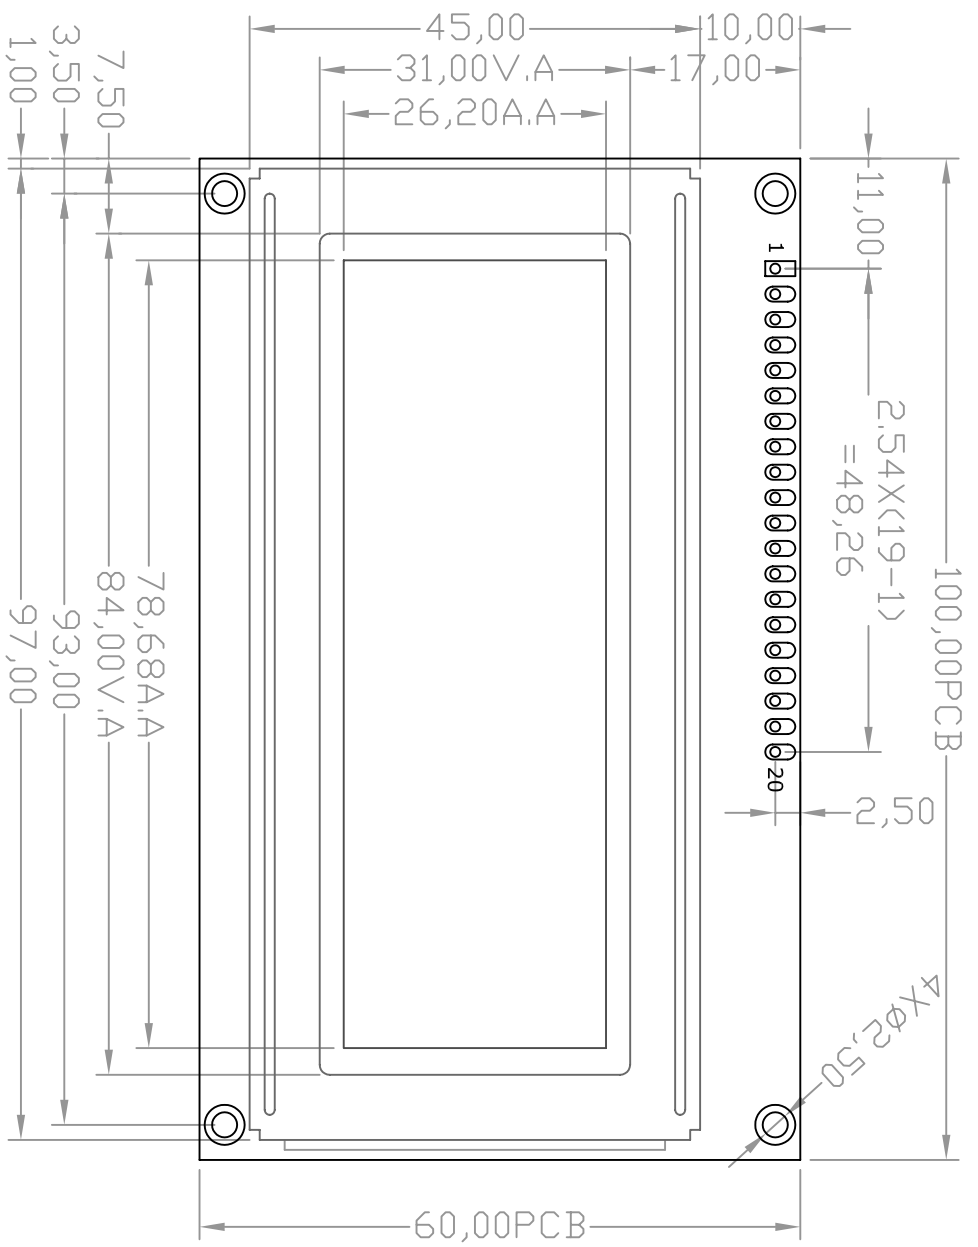

PIN	SYMBOL
1	CSA
2	CSB
3	GND
4	VDD
5	V _D
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	LEDK
19	RESET
20	VOUT

Specification:

- 1). Driving: Duty: 1/64, Bias:1/9,
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/NEGATIVE/BLUE
- 4). Operating temp.: -20° C~+70° C
Storage temp.: -30° C~+80° C
- 5). IC: S6B0108B
- 6). B/L: with



深圳市新恒信科技有限公司

GENERAL TOL: ±0.5	UNIT mm	SCALE: FIT	SHEET: PROJECTION	1 OF 1
APPROVALS	DATE	MODEL NUMBER	PART NO:	C/D
App:		SM19264B00		SM19264B00-01
CHK:				
DWNS:		DO NOT SCALE THIS DRAWING.		